Product Specification



Ord.-No.: 111 661


Specification: Roof conductor holder, V2A-Alu, Ø 8 mm, type B

with adhesive pad, height of conductor leading 20,5 mm

Performance: Roof conductor holder according to DIN EN 62561-4 for installing round

conductors to metal roofs and metal surfaces.

Type with Niro-Clip conductor fastener and adhesive pad.

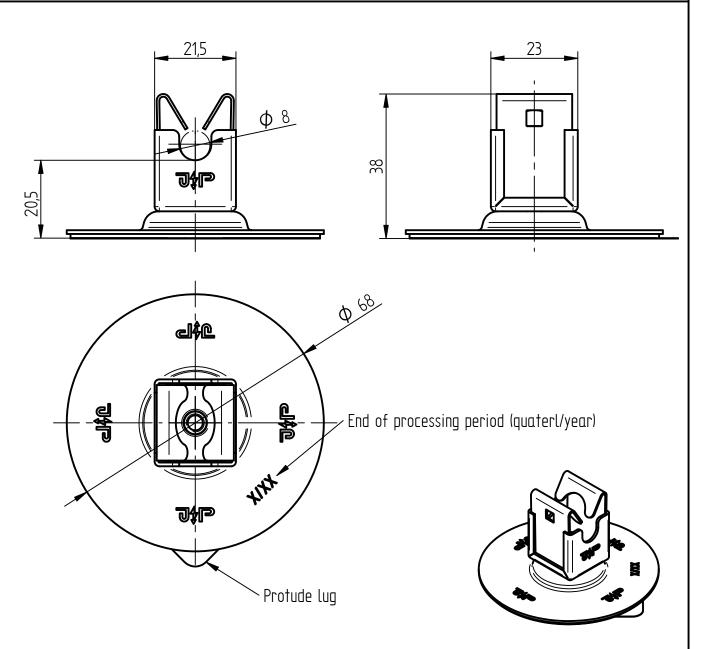

The adhesive area on the smooth surface should be thoroughly cleaned before applying the support for example with isopropylalcohol! Processing temperature +15 to +25°C!

Other important information is given in the installation instructions.

Material of conductor fastener	stainless steel V2A
Material of base	aluminium
Dimensions of base	Ø 68 mm
Height of conductor leading	20,5 mm
Fit of conductor fastener	Ø 8 mm
Conductor leading	loose, type B
Weight	40 g
Standard reference	DIN EN 62561-4
Packing unit	100 units

J. Pröpster GmbH | Manufacturer of lightning protection and earthing materials | Regensburger Str. 116 | 92318 Neumarkt/OPf. Germany | Phone.: +49 (0) 9181 25 90-0 | Fax: +49 (0) 9181 25 90-10 | Web: www.proepster.de | Email: info@proepster.de

We reserve the right to introduce changes and alterations in shape and technology, dimensions weights and materials. Illustrations are non-binding

Formsheet 991-102-2/22_01_28